

2015 Aluminium series

ALU-WAVE





WIDIN






The future of WIDIN is always bright.

WIDIN will share the same vision with customers by providing top quality products at competitive price, best service and pursue the core management doctrine of "Customer-based management".

With the WIDIN's rapid growth, its export is also increasing every year through steady improvement in technology, quality and great efforts for opening up a new market.

As WIDIN's mission, endless growth and development, WIDIN will make steady progress to the world.



Greeting

Making customer's dreams a reality- The best mechanical solution


Since its establishment in 1988, WIDIN CO.,LTD. has been contributed to pursue the utmost customer satisfaction for the current and potential customers in the globalized market.

With continuously doing development and creativeness of the new technology through the great initiative, we, WIDIN CO.,LTD. is always ready to response of customer needs in customer mind and eye.

To cope with the enormous, various customer demands and satisfaction from popular products to high value added products in the cutting tools industry, WIDIN CO.,LTD. will put its best effort and will play a role of marketing initiator to lead the new 21st era by production and marketing linkage.





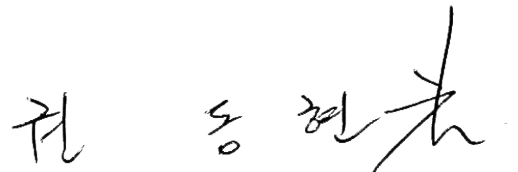




Aim to provide the best for money, fine tuned price, utmost quality, excellent customer services based on professionalism, all WIDIN CO.,LTD. will promise to do its best effort at time and where it is.

Thank you.



President and CEO Dong Hyun Kwon


ALU-WAVE SERIES

EDP NO.	APPEARANCE	FEATURE	STOCK	PAGE
WAB312 ...series		2 FLUTE, 50° HELIX BALL ENDMILL- FOR ALUMINUM	•	6
WAE301 ...series		1 FLUTE-FOR PLASTIC AND NONFERROUS	•	7
WAE302 ...series		2 FLUTE, 45° HELIX-FOR ALUMINUM	•	9
WAE30(2)3 ...series		3 FLUTE-45° LONG & EXTRA LONG LENGTH - FOR ALUMINUM	•	11
WAR302 ...series		2FLUTE, 45° HELIX CORNER RADIUS - FOR ALUMINUM	•	16
WAR303 ...series		3 FLUTE, 45° HELIX CORNER RADIUS - FOR ALUMINUM	•	18
WAR502 ...series		2 FLUTE, CORNER RADIUS WITH D,L,C COATED - FOR ALUMINUM & NONFERROUS	•	20
WAR503 ...series		3 FLUTE, CORNER RADIUS WITH D,L,C COATED - FOR ALUMINUM & NONFERROUS	•	21
WAF303 ...series		38° HELIX ROUGHING ENDMILL - FOR ALUMINUM	•	22



2 FLUTE, 50° HELIX BALL ENDMILL– FOR ALUMINUM
 2 FLUTE, STUB CUT BALL NOSE-for Aluminum

- Excellent cutting quality on aluminum & copper
- high polished flute face improving chip evacuation and Lubricity

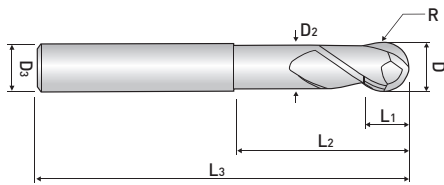

WAB312 ...series




EDP NO.	DIAMETER	RADIUS	CUTTING LENGTH	NECK LENGTH	OVERALL LENGTH	NECK DIAMETER	SHANK DIAMETER
	D	R	L1	L2	L3	D2	D3
WAB312 060	6	3	5,5	25	55	5,4	6
WAB312 061	6	3	5,5	40	90	5,4	6
WAB312 080	8	4	7	30	65	7,2	8
WAB312 081	8	4	7	50	100	7,2	8
WAB312 100	10	5	8,5	35	75	9	10
WAB312 101	10	5	10	50	100	9	10
WAB312 102	10	5	10	60	150	9	10
WAB312 120	12	6	10,5	40	75	11	12
WAB312 121	12	6	12	50	110	11	12
WAB312 122	12	6	12	60	150	11	12
WAB312 160	16	8	14	50	90	14,5	16
WAB312 161	16	8	16	70	150	14,5	16
WAB312 162	16	8	16	90	200	14,5	16
WAB312 200	20	10	17	50	100	18	20

■ Tolerance

Mill Dia.(mm)	Shank dia.
±0,02	h6

※ Items can be changed for quality improvement without notice



1 FLUTE-FOR PLASTIC AND NONFERROUS 1 FLUTE EndMills - for Aluminum

- Suitable for Acryl, ABS, Mock-up, Nonferrous
- 1F helix type for excellent chip disposal suitable for cutting, slotting for non-ferrous work pieces
- Good wear-resistance using micro grain Alloy material

WAE301 ...series




EDP NO.	DIAMETER	CUTTING LENGTH	OVERALL LENGTH	SHANK DIAMETER
	D	L1	L2	D2
WAE301 002	0.2	0.3	40	4
WAE301 003	0.3	0.9	40	4
WAE301 004	0.4	1.2	40	4
WAE301 005	0.5	1.5	40	4
WAE301 006	0.6	1.8	40	4
WAE301 007	0.7	2.1	40	4
WAE301 008	0.8	2.4	40	4
WAE301 009	0.9	2.7	40	4
WAE301 010	1	3	45	6
WAE301 010-4,5	1	4.5	45	6
WAE301 010-6	1	6	50	6
WAE301 012	1.2	3	45	6
WAE301 012-5	1.2	5	45	6
WAE301 012-6	1.2	6	50	6
WAE301 015	1.5	4	45	6
WAE301 015-6	1.5	6	50	6
WAE301 015-8	1.5	8	50	6
WAE301 020	2	6	50	6
WAE301 020-8	2	8	50	6
WAE301 020-10	2	10	50	6
WAE301 025	2.5	7	50	6

■ Tolerance

Mill Dia.(mm)		Shank dia.
Diameter	Tolerance	
D ≤ 5	0 ~ -0,02	h6
D > 5	0 ~ -0,03	

※ Items can be changed for quality improvement without notice



1 FLUTE-FOR PLASTIC AND NONFERROUS 1 FLUTE EndMills - for Aluminum

- Suitable for Acryl, ABS, Mock-up, Nonferrous
- 1F helix type for excellent chip disposal suitable for cutting, slotting for non-ferrous work pieces
- Good wear-resistance using micro grain Alloy material

WAE301 ...series




EDP NO.	DIAMETER		CUTTING LENGTH		OVERALL LENGTH		SHANK DIAMETER	
	D		L1		L2		D2	
WAE301 025-8	2.5		8		50		6	
WAE301 025-10	2.5		10		50		6	
WAE301 025-12	2.5		12		50		6	
WAE301 030	3		8		50		6	
WAE301 030-12	3		12		50		6	
WAE301 030-15	3		15		50		6	
WAE301 040	4		10		50		6	
WAE301 040-15	4		15		50		6	
WAE301 040-20	4		20		60		6	
WAE301 050	5		13		60		6	
WAE301 050-20	5		20		60		6	
WAE301 050-25	5		25		60		6	
WAE301 060	6		15		60		6	
WAE301 060-20	6		20		60		6	
WAE301 060-25	6		25		60		6	
WAE301 080	8		20		70		8	
WAE301 080-25	8		25		75		8	
WAE301 100	10		22		75		10	
WAE301 100-30	10		30		80		10	
WAE301 120	12		26		75		12	
WAE301 120-35	12		35		90		12	

■ Tolerance

Mill Dia.(mm)		Shank Dia.
Diameter	Tolerance	
D ≤ 5	0 ~ -0,02	h6
D > 5	0 ~ -0,03	


※ Items can be changed for quality improvement without notice



2 FLUTE, 45° HELIX – FOR ALUMINUM
 2 FLUTE, REGULAR LENGTH for Aluminum

- Suitable for Aluminum, Aluminum Alloy, Copper & Non-ferrous material
- high polished flute face improving chip evacuation and Lubricity

WAE302 ...series




주문번호	DIAMETER	CUTTING LENGTH	OVERALL LENGTH	SHANK DIAMETER
EDP NO.	D	L ₁	L ₂	D ₂
WAE302 010	1	3	50	4
WAE302 010-6	1	6	60	6
WAE302 012	1.2	4	50	6
WAE302 015	1.5	6	50	6
WAE302 015-8	1.5	8	60	6
WAE302 020 S4	2	6	50	4
WAE302 020	2	6	50	6
WAE302 020-10	2	10	60	6
WAE302 025	2.5	12	55	6
WAE302 030	3	12	55	6
WAE302 030-15	3	15	65	6
WAE302 035	3.5	14	57	6
WAE302 040	4	14	55	6
WAE302 040-16	4	16	65	6
WAE302 050	5	17	55	6
WAE302 050-22	5	22	60	6
WAE302 060	6	17	60	6
WAE302 060-22	6	22	60	6
WAE302 070	7	20	63	8
WAE302 080	8	23	70	8
WAE302 080-31	8	31	80	8
WAE302 090	9	25	72	10
WAE302 100	10	28	75	10
WAE302 100-36	10	36	90	10
WAE302 110	11	30	80	12
WAE302 120	12	33	80	12
WAE302 120-41	12	41	95	12

■ Tolerance

Mill Dia.(mm)	Shank Dia.
0 ~ -0.02	h6


※ Items can be changed for quality improvement without notice



2 FLUTE, 45° HELIX – FOR ALUMINUM
 2 FLUTE, REGULAR LENGTH for Aluminum

- Suitable for Aluminum, Aluminum Alloy, Copper & Non-ferrous material
- high polished flute face improving chip evacuation and Lubricity

WAE302 ...series




EDP NO.	DIAMETER	CUTTING LENGTH	OVERALL LENGTH	SHANK DIAMETER
	D	L ₁	L ₂	D ₂
WAE302 122	12	45	100	12
WAE302 130	13	35	85	14
WAE302 140	14	38	90	14
WAE302 150	15	40	90	16
WAE302 160	16	45	100	16
WAE302 160-53	16	53	110	16
WAE302 180	18	49	100	18
WAE302 200	20	50	100	20
WAE302 200-55	20	55	110	20
WAE302 250	25	50	120	25

■ Tolerance

Mill Dia.(mm)	Shank Dia.
0 ~ -0,02	h6


※ Items can be changed for quality improvement without notice



3 FLUTE-45° LONG & EXTRA LONG LENGTH - FOR ALUMINUM

- Suitable for Aluminum, Aluminum Alloy, Copper & Non-ferrous material
- Suitable for high speed cutting
- Optimized design for reducing cutting load and maximizing chip evacuation

WAE30(2)3 ...series




EDP NO.	DIAMETER	CUTTING LENGTH	OVERALL LENGTH	SHANK DIAMETER
	D	L1	L2	D2
WAE303 010-02	1	2	40	6
WAE303 010-025	1	2,5	40	6
WAE303 010	1	3	50	6
WAE303 010-04	1	4	60	6
WAE303 010-06	1	6	60	6
WAE303 012	1,2	4	50	6
WAE303 015-03	1,5	3	40	6
WAE303 015	1,5	5	50	6
WAE303 015-06	1,5	6	60	6
WAE303 015-08	1,5	8	60	6
WAE303 015-10	1,5	10	60	6
WAE303 020-03	2	3	40	6
WAE303 020	2	6	50	6
WAE303 020-08	2	8	60	6
WAE303 020-10	2	10	60	6
WAE303 020-12	2	12	60	6
WAE303 025	2,5	8	40	6
WAE303 025-10	2,5	10	55	6
WAE303 025-12	2,5	12	60	6
WAE303 030-04	3	4	45	6
WAE303 030-08	3	8	45	6
WAE303 030	3	12	55	6
WAE303 031	3	15	65	6
WAE323 030	3	20	70	6
WAE323 031	3	25	75	6

■ Tolerance

Mill Dia.(mm)	Shank Dia.
0 ~ -0,02	h6


※ Items can be changed for quality improvement without notice



3 FLUTE-45° LONG & EXTRA LONG LENGTH – FOR ALUMINUM

- Suitable for Aluminum, Aluminum Alloy, Copper & Non-ferrous material
- Suitable for high speed machining
- Optimized design for reducing cutting load and maximizing chip evacuation

WAE30(2)3 ...series




EDP NO.	DIAMETER	CUTTING LENGTH	OVERALL LENGTH	SHANK DIAMETER
	D	L ₁	L ₂	D ₂
WAE323 032	3	30	80	6
WAE303 035	3.5	12	55	6
WAE303 040-05	4	5	45	6
WAE303 040-08	4	8	45	6
WAE303 040-11	4	11	45	6
WAE303 040	4	14	55	6
WAE303 040-16	4	16	65	6
WAE303 041	4	20	70	6
WAE323 040	4	26	75	6
WAE323 041	4	30	80	6
WAE303 045	4.5	15	55	6
WAE303 050-06	5	6	45	6
WAE303 050	5	17	55	6
WAE303 051	5	22	60	6
WAE303 052	5	26	70	6
WAE323 050	5	31	75	6
WAE323 051	5	36	80	6
WAE323 052	5	41	85	6
WAE323 053	5	46	90	6
WAE303 055	5.5	17	55	6
WAE303 060-07	6	7	50	6
WAE303 060-13	6	13	50	6
WAE303 060	6	17	60	6
WAE303 061	6	22	60	6
WAE303 062	6	26	70	6

■ Tolerance

Mill Dia.(mm)	Shank Dia.
0 ~ -0,02	h6


※ Items can be changed for quality improvement without notice



3 FLUTE-45° LONG & EXTRA LONG LENGTH – FOR ALUMINUM

- Suitable for Aluminum, Aluminum Alloy, Copper & Non-ferrous material
- Suitable for high speed machining
- Optimized design for reducing cutting load and maximizing chip evacuation

WAE30(2)3 ...series



EDP NO.	DIAMETER	CUTTING LENGTH	OVERALL LENGTH	SHANK DIAMETER
	D	L ₁	L ₂	D ₂
WAE303 063	6	31	75	6
WAE323 060	6	36	80	6
WAE323 061	6	43	90	6
WAE323 062	6	51	100	6
WAE303 070	7	23	65	8
WAE303 080-10	8	10	60	8
WAE303 080-20	8	20	60	8
WAE303 080	8	23	70	8
WAE303 080-29	8	29	80	8
WAE303 081	8	31	80	8
WAE303 082	8	36	85	8
WAE323 080	8	41	90	8
WAE323 081	8	46	95	8
WAE323 082	8	51	100	8
WAE323 083	8	56	105	8
WAE323 084	8	66	110	8
WAE303 090	9	28	70	10
WAE303 100-12	10	12	65	10
WAE303 100-23	10	23	65	10
WAE303 100	10	28	75	10
WAE303 100-33	10	33	90	10
WAE303 101	10	36	90	10
WAE303 100-41	10	41	90	10
WAE303 102	10	46	100	10
WAE303 103	10	51	100	10

■ Tolerance


Mill Dia.(mm)	Shank Dia.
0 ~ -0,02	h6

※ Items can be changed for quality improvement without notice




3 FLUTE-45° LONG & EXTRA LONG LENGTH – FOR ALUMINUM

- Suitable for Aluminum, Aluminum Alloy, Copper & Non-ferrous material
- Suitable for high speed machining
- Optimized design for reducing cutting load and maximizing chip evacuation



WAE30(2)3 ...series




EDP NO.	DIAMETER	CUTTING LENGTH	OVERALL LENGTH	SHANK DIAMETER
	D	L ₁	L ₂	D ₂
WAE323 100	10	56	110	10
WAE323 100-61	10	61	110	10
WAE323 101	10	66	120	10
WAE303 110	11	30	80	12
WAE303 120-14	12	14	70	12
WAE303 120-27	12	27	70	12
WAE303 120	12	33	80	12
WAE303 121	12	41	95	12
WAE303 122	12	46	100	12
WAE303 122-51	12	51	100	12
WAE303 123	12	56	110	12
WAE303 124-61	12	61	110	12
WAE323 120	12	66	120	12
WAE323 120-71	12	71	120	12
WAE323 121	12	76	135	12
WAE303 130	13	35	85	14
WAE303 140	14	38	90	14
WAE303 150	15	40	90	16
WAE303 160-19	16	19	90	16
WAE303 160-33	16	33	90	16
WAE303 160	16	45	100	16
WAE303 160-53	16	53	105	16
WAE303 161	16	56	110	16

■ Tolerance

Mill Dia.(mm)	Shank Dia.
0 ~ -0,02	h6


※ Items can be changed for quality improvement without notice



3 FLUTE-45° LONG & EXTRA LONG LENGTH – FOR ALUMINUM

- Suitable for Aluminum, Aluminum Alloy, Copper & Non-ferrous material
- Suitable for high speed machining
- Optimized design for reducing cutting load and maximizing chip evacuation

WAE30(2)3 ...series




EDP NO.	DIAMETER	CUTTING LENGTH	OVERALL LENGTH	SHANK DIAMETER
	D	L1	L2	D2
WAE303 162	16	66	130	16
WAE303 163	16	76	150	16
WAE323 160	16	86	160	16
WAE323 161	16	96	180	16
WAE323 162	16	106	190	16
WAE323 163	16	116	200	16
WAE303 180	18	49	100	18
WAE303 200-23	20	23	90	20
WAE303 200-39	20	39	90	20
WAE303 200	20	50	100	20
WAE303 201	20	60	110	20
WAE303 202	20	70	130	20
WAE303 203	20	76	150	20
WAE323 200	20	86	160	20
WAE323 201	20	96	180	20
WAE323 202	20	106	190	20
WAE323 203	20	116	200	20
WAE323 204	20	126	220	20
WAE303 250	25	50	120	25

■ Tolerance

Mill Dia.(mm)	Shank Dia.
0 ~ -0,02	h6

※ Items can be changed for quality improvement without notice



2FLUTE, 45° HELIX CORNER RADIUS-FOR ALUMINUM
 2 FLUTE, REGULAR LENGTH, CORNER RADIUS - for Aluminum

- Suitable for Aluminum, Aluminum Alloy, Copper & Non-Ferrous Material

WAR302 ...series




EDP NO.	DIAMETER	CORNER RADIUS	CUTTING LENGTH	OVERALL LENGTH	SHANK DIAMETER
	D	R	L1	L2	D2
WAR302 06 05	6	0.5	15	50	6
WAR302 06 10	6	1	15	50	6
WAR302 06 15	6	1.5	15	50	6
WAR302 06 20	6	2	15	50	6
WAR302 08 05	8	0.5	20	60	8
WAR302 08 10	8	1	20	60	8
WAR302 08 15	8	1.5	20	60	8
WAR302 08 20	8	2	20	60	8
WAR302 08 30	8	3	20	60	8
WAR302 10 05	10	0.5	25	70	10
WAR302 10 10	10	1	25	70	10
WAR302 10 15	10	1.5	25	70	10
WAR302 10 20	10	2	25	70	10
WAR302 10 30	10	3	25	70	10
WAR302 10 40	10	4	25	70	10
WAR302 12 10	12	1	30	75	12
WAR302 12 20	12	2	30	75	12
WAR302 12 30	12	3	30	75	12
WAR302 12 40	12	4	30	75	12
WAR302 14 10	14	1	35	80	14
WAR302 14 20	14	2	35	80	14
WAR302 14 30	14	3	35	80	14
WAR302 14 40	14	4	35	80	14
WAR302 14 50	14	5	35	80	14

■ Tolerance

Mill Dia. (mm)	Shank Dia.
0 ~ -0,02	h6

※ Items can be changed for quality improvement without notice.



2FLUTE, 45° HELIX CORNER RADIUS-FOR ALUMINUM
 2 FLUTE, REGULAR LENGTH, CORNER RADIUS - for Aluminum

- Suitable for Aluminum, Aluminum Alloy, Copper & Non-Ferrous Material

WAR302 ...series




EDP NO.	DIAMETER	CORNER RADIUS	CUTTING LENGTH	OVERALL LENGTH	SHANK DIAMETER
	D	R	L ₁	L ₂	D ₂
WAR302 16 10	16	1	40	90	16
WAR302 16 20	16	2	40	90	16
WAR302 16 30	16	3	40	90	16
WAR302 16 40	16	4	40	90	16
WAR302 16 50	16	5	40	90	16
WAR302 20 10	20	1	45	100	20
WAR302 20 20	20	2	45	100	20
WAR302 20 30	20	3	45	100	20
WAR302 20 40	20	4	45	100	20
WAR302 20 50	20	5	45	100	20

■ Tolerance

Mill Dia.(mm)	Shank Dia.
0 ~ -0.02	h6

※ Items can be changed for quality improvement without notice.

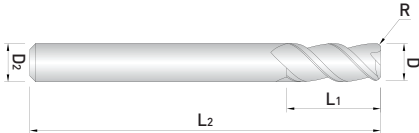

3 FLUTE, 45° HELIX CORNER RADIUS—FOR ALUMINUM
 3 FLUTE, REGULAR LENGTH, CORNER RADIUS - for Aluminum

- Suitable for Aluminum, Aluminum Alloy, Copper & Non-Ferrous Material
- Suitable for High Speed Cutting
- Optimized design for reducing cutting load and effective chip evacuation

WAR303 ...series




EDP NO.	DIAMETER	CORNER RADIUS	CUTTING LENGTH	OVERALL LENGTH	SHANK DIAMETER
	D	R	L ₁	L ₂	D ₂
WAR303 06 05	6	0.5	15	50	6
WAR303 06 10	6	1	15	50	6
WAR303 06 15	6	1.5	15	50	6
WAR303 06 20	6	2	15	50	6
WAR303 08 05	8	0.5	20	60	8
WAR303 08 10	8	1	20	60	8
WAR303 08 15	8	1.5	20	60	8
WAR303 08 20	8	2	20	60	8
WAR303 10 05	10	0.5	25	70	10
WAR303 10 10	10	1	25	70	10
WAR303 10 15	10	1.5	25	70	10
WAR303 10 20	10	2	25	70	10
WAR303 10 30	10	3	25	70	10
WAR303 10 40	10	4	25	70	10
WAR303 12 10	12	1	30	75	12
WAR303 12 20	12	2	30	75	12
WAR303 12 30	12	3	30	75	12

■ Tolerance

Mill Dia. (mm)	Shank Dia.
0 ~ -0,02	h6

※ Items can be changed for quality improvement without notice.

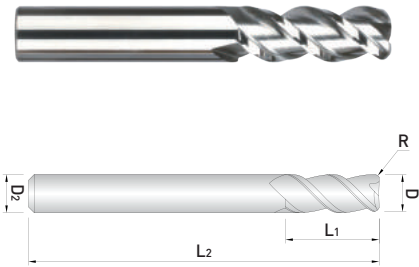

3 FLUTE, 45° HELIX CORNER RADIUS-FOR ALUMINUM 3 FLUTE, REGULAR LENGTH, CORNER RADIUS - for Aluminum

- Suitable for Aluminum, Aluminum Alloy, Copper & Non-Ferrous Material
- Suitable for High Speed Cutting
- Optimized design for reducing cutting load and effective chip evacuation

WAR303 ...series




EDP NO.	DIAMETER	CORNER RADIUS	CUTTING LENGTH	OVERALL LENGTH	SHANK DIAMETER
	D	R	L ₁	L ₂	D ₂
WAR303 12 40	12	4	30	75	12
WAR303 14 10	14	1	35	80	14
WAR303 14 20	14	2	35	80	14
WAR303 14 30	14	3	35	80	14
WAR303 14 40	14	4	35	80	14
WAR303 14 50	14	5	35	80	14
WAR303 16 10	16	1	40	90	16
WAR303 16 20	16	2	40	90	16
WAR303 16 30	16	3	40	90	16
WAR303 16 40	16	4	40	90	16
WAR303 16 50	16	5	40	90	16
WAR303 20 10	20	1	45	100	20
WAR303 20 20	20	2	45	100	20
WAR303 20 30	20	3	45	100	20
WAR303 20 40	20	4	45	100	20
WAR303 20 50	20	5	45	100	20

■ Tolerance


Mill Dia.(mm)	Shank Dia.
0 ~ -0.02	h6

※ Items can be changed for quality improvement without notice.



- 2 FLUTE, CORNER RADIUS WITH D,L,C COATED**
 – FOR ALUMINUM & NONFERROUS
- 2 FLUTE, CORNER RADIUS, LONG LENGTH,D.L.C. COATING**
- Suitable for Aluminum, Aluminum Alloy, Copper & Non-Ferrous Material
 - Adjust Corner Radius to prevent chipping (Not applicable for R Shape machining)
 - Diamond Film Coating maximizes the tool life.

WAR502 ...series




EDP NO.	DIAMETER	CORNER RADIUS	CUTTING LENGTH	NECK LENGTH	SHANK DIAMETER
	D	R	L ₁	L ₂	D ₂
WAR502 010	1	0.05	3	40	6
WAR502 015	1.5	0.05	5	40	6
WAR502 020	2	0.1	6	40	6
WAR502 021	2	0.1	12	50	6
WAR502 030	3	0.1	10	50	6
WAR502 031	3	0.1	20	60	6
WAR502 040	4	0.1	12	50	6
WAR502 041	4	0.1	20	60	6
WAR502 050	5	0.1	15	57	6
WAR502 060	6	0.1	15	57	6
WAR502 061	6	0.1	22	65	6
WAR502 070	7	0.1	20	63	8
WAR502 080	8	0.1	20	63	8
WAR502 081	8	0.1	28	70	8
WAR502 090	9	0.1	25	72	10
WAR502 100	10	0.2	28	72	10
WAR502 101	10	0.2	32	80	10
WAR502 110	11	0.2	30	80	12
WAR502 120	12	0.2	32	80	12
WAR502 121	12	0.2	40	100	12

■ Tolerance

Mill Dia, (mm)	Shank dia,
0 ~ -0,02	h6


※ Items can be changed for quality improvement without notice.

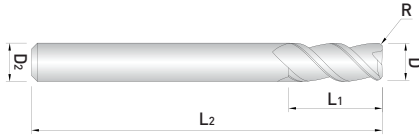

3 FLUTE, CORNER RADIUS WITH D.L.C COATED
– FOR ALUMINUM & NONFERROUS
3 FLUTE, CORNER RADIUS, LONG LENGTH, D.L.C. COATING

- Suitable for Aluminum, Aluminum Alloy, Copper & Non-Ferrous Material
- Diamond Film Coating maximizes the tool life.

WAR503 ...series




EDP NO.	DIAMETER	CORNER RADIUS	CUTTING LENGTH	OVERALL LENGTH	SHANK DIAMETER
	D	R	L ₁	L ₂	D ₂
WAR503 040	4	0.5	14	57	6
WAR503 041	4	1	25	62	6
WAR503 060	6	0.5	16	57	6
WAR503 061	6	1	25	62	6
WAR503 080	8	0.5	22	63	8
WAR503 081	8	1	35	80	8
WAR503 100	10	0.5	28	72	10
WAR503 101	10	1	45	100	10
WAR503 120	12	0.5	32	80	12
WAR503 121	12	1	45	100	12
WAR503 160	16	0.5	45	90	16
WAR503 161	16	1	65	125	16
WAR503 200	20	0.5	50	100	20
WAR503 201	20	1	70	130	20

■ Tolerance

Mill Dia. (mm)	Shank dia.
0 ~ -0.02	h6

※ Items can be changed for quality improvement without notice.



38° HELIX ROUGHING ENDMILL – FOR ALUMINUM
 ROUGHING ENDMILL - for Aluminum
 DIN6527L / DIN6535-HA, DIN6535-HB

– Suitable for Aluminum, Aluminum Alloy, Copper & Non-Ferrous Material

WAF303 ...series



EDP NO.	DIAMETER	CUTTING LENGTH	OVERALL LENGTH	SHANK DIAMETER
	D	L1	L2	D2
WAF303 040	4	10	55	6
WAF303 050	5	15	55	6
WAF303 060	6	16	60	6
WAF303 061	6	25	80	6
WAF303 070	7	16	63	8
WAF303 080	8	20	65	8
WAF303 081	8	30	90	8
WAF303 090	9	19	72	10
WAF303 100	10	25	75	10
WAF303 101	10	40	100	10
WAF303 120	12	30	80	12
WAF303 121	12	50	110	12
WAF303 140	14	35	90	14
WAF303 160	16	42	100	16
WAF303 161	16	52	150	16
WAF303 162	16	65	125	16
WAF303 180	18	32	92	18
WAF303 200	20	38	104	20
WAF303 201	20	55	160	20

※ Flat Shank is available upon request
 ex) WAF303100F

■ Tolerance μm = 1/1000mm

Tolerance \ Dia.	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30
Cutting Edge(h10)	0 -40	0 -48	0 -58	0 -70	0 -84
Shank(h6)	0 -6	0 -8	0 -9	0 -11	0 -13


※ Items can be changed for quality improvement without notice.

WAB312 series ▶

General Cutting

MATERIAL	ALUMINIUM ALLOY		COPPER ALLOY	
HARDNESS				
DIAMETER(mm)	RPM	FEED	RPM	FEED
6	18,000	1,750	5,500	440
8	14,000	2,000	4,200	500
10	14,000	2,350	4,200	580
12	14,000	3,000	4,200	750
16	11,000	2,700	3,300	670
20	8,000	2,200	2,200	600

RPM = rev. / min.
FEED = mm / min.




WAE301 series ▶ Slotting

General Cutting

MATERIAL	ACRYLIC		ALLOY STEELS	
DIAMETER(mm)	RPM	FEED	RPM	FEED
1.0	32,000	2,000	23,000	1,300
2.0	32,000	2,200	23,000	1,500
3.0	25,000	2,400	18,000	1,700
4.0	20,000	2,400	15,000	1,800
5.0	15,000	2,200	12,000	1,800
6.0	13,500	2,300	10,000	1,800
8.0	10,000	2,400	7,800	1,900
10.0	8,000	2,400	6,000	2,000
12.0	7,000	2,200	5,000	1,900


RPM=rev. / min.
FEED=mm / min.




WAE302 series ▶ Slotting, Side Cutting

General Cutting

MATERIAL	ALLOY STEELS, CAST IRON		ALUMINUM	
HARDNESS	~HB 230			
DIAMETER(mm)	RPM	FEED	RPM	FEED
1.0	16,870	505	16,870	845
1.5	13,150	525	13,150	790
2.0	11,300	565	11,300	790
2.5	10,565	635	10,565	845
3.0	10,000	700	10,000	900
4.0	10,000	900	10,000	1,100
5.0	10,000	1,000	10,000	1,300
6.0	10,000	1,200	10,000	1,500
7.0	8,850	1,240	8,850	1,505
8.0	8,000	1,400	8,000	1,800
9.0	8,000	1,550	8,000	1,680
10.0	8,000	1,700	8,000	2,100
12.0	8,000	2,100	8,000	2,600
14.0	6,000	1,800	6,000	2,200
16.0	6,000	1,900	6,000	2,400
18.0	4,000	1,400	4,000	1,800
20.0	4,000	1,600	4,000	1,900



A : $\phi 3 \sim \phi 10 = 0.25 \times D$
 $\phi 12 \sim \phi 20 = 0.5 \times D$




WAE30(2)3 series ▶ Side Cutting

General Cutting

MATERIAL	ALUMINUM, NONFERROUS METALS	
DIAMETER(mm)	RPM	FEED
3	7,000	455
4	7,000	546
5	7,000	651
6	7,000	756
8	5,600	861
10	5,600	1,050
12	5,600	882
14	4,200	1,106
16	4,200	1,211
18	2,800	910
20	2,800	956

RPM=rev. / min.
 FEED=mm / min.




□ Please reduce cutting speed around 20~30% from the above table for AE323 series

WAE30(2)3 series ▶ Slotting

General Cutting

MATERIAL	ALUMINUM, NONFERROUS METALS	
DIAMETER(mm)	RPM	FEED
3	7,000	350
4	7,000	441
5	7,000	504
6	7,000	606
8	5,600	700
10	5,600	854
12	5,600	1,050
14	4,200	903
16	4,200	945
18	2,800	700
20	2,800	805

RPM=rev. / min.
FEED=mm / min.




WAR302 series ▶ Side Cutting

High Speed Cutting

MATERIAL	ALUMINUM ALLOY (<Si 4%)		ALUMINUM ALLOY (<Si 8%)		ALUMINUM ALLOY (DIE CASTING)		ALUMINUM ALLOY (Cu)	
	RPM	FEED	RPM	FEED	RPM	FEED	RPM	FEED
DIAMETER(mm)								
4	24,000	4,800	19,900	3,980	16,000	3,200	12,000	2,400
6	16,000	3,840	13,200	3,160	10,600	2,544	8,000	1,920
8	12,000	3,600	9,900	2,970	8,000	2,400	6,000	1,800
10	9,500	3,420	8,000	2,880	6,300	2,260	4,800	1,720
12	8,000	3,200	6,600	2,640	5,300	2,120	4,000	1,600
14	6,800	2,990	5,600	2,460	4,500	1,980	3,400	1,490
16	6,000	3,000	5,000	2,500	4,000	2,000	3,000	1,500
18	5,300	2,600	4,400	2,200	3,500	1,750	2,600	1,300
20	4,800	2,400	4,000	2,000	3,200	1,600	2,400	1,200

RPM=rev. / min.
FEED=mm / min.




WAR302 series ▶ Slotting

General Cutting

MATERIAL	ALUMINUM ALLOY (<Si 4%)		ALUMINUM ALLOY (<Si 8%)		ALUMINUM ALLOY (DIE CASTING)		ALUMINUM ALLOY (Cu)	
	RPM	FEED	RPM	FEED	RPM	FEED	RPM	FEED
DIAMETER(mm)								
4	24,000	3,840	19,900	2,980	16,000	2,240	12,000	1,440
6	16,000	3,072	13,200	2,370	10,600	1,780	8,000	1,150
8	12,000	2,880	9,900	2,230	8,000	1,680	6,000	1,080
10	9,500	2,730	8,000	2,160	6,300	1,580	4,800	1,030
12	8,000	2,560	6,600	1,980	5,300	1,480	4,000	960
14	6,800	2,390	5,600	1,845	4,500	1,380	3,400	890
16	6,000	2,400	5,000	1,870	4,000	1,400	3,000	900
18	5,300	2,080	4,400	1,650	3,500	1,220	2,600	780
20	4,800	1,920	4,000	1,500	3,200	1,260	2,400	720

RPM=rev. / min.
FEED=mm / min.





WAR502 series ▶ Side Cutting, Slotting

General Cutting

MATERIAL	ALUMUNUM ALLOY (A7075)		ALUMINUM ALLOY CASTING (Si13%)		MAGNESIUM ALLOY, COPPER ALLOY	
	DIAMETER(mm)	RPM	FEED	RPM	FEED	FEED
1	32,000	220	32,000	220	23,000	220
1.2	32,000	230	32,000	230	19,000	220
1.4	32,000	260	32,000	260	16,500	220
1.5	32,000	280	32,000	280	15,500	220
1.6	32,000	320	32,000	320	14,500	220
1.8	32,000	360	32,000	360	13,000	220
2	32,000	420	32,000	420	11,500	220
2.5	25,000	600	25,000	600	9,500	250
3	21,000	700	21,000	700	7,950	250
4	15,500	725	15,500	725	5,950	280
5	12,500	760	12,500	760	4,750	295
6	10,500	830	10,500	830	3,950	310
8	7,950	890	7,950	890	2,950	300
10	6,350	995	6,350	995	2,350	365
12	5,300	1,050	5,300	1,050	1,950	390

RPM=rev. / min.
FEED=mm / min.




WAR502 series ▶ Side Cutting, Slotting


High Speed Cutting

MATERIAL	ALUMUNUM ALLOY (A7075)		ALUMINUM ALLOY CASTING (Si13%)		MAGNESIUM ALLOY, COPPER ALLOY	
	DIAMETER(mm)	RPM	FEED	RPM	FEED	FEED
1	50,000	1,000	50,000	950	42,000	700
1.2	50,000	1,200	50,000	1,150	36,000	700
1.4	50,000	1,400	50,000	1,250	31,000	700
1.5	50,000	1,600	48,000	1,250	29,500	700
1.6	50,000	1,700	45,000	1,250	28,000	700
1.8	50,000	1,850	41,000	1,250	26,500	750
2	50,000	2,000	38,000	1,250	24,000	750
2.5	48,000	2,100	31,000	1,250	20,000	750
3	40,000	2,100	26,000	1,250	17,000	750
4	33,000	2,250	20,000	1,350	14,000	800
5	31,000	2,800	19,200	1,650	12,500	950
6	26,000	2,800	15,900	1,700	10,500	1,000
8	19,500	2,900	12,000	1,800	7,900	1,000
10	15,500	3,200	9,600	1,900	6,350	1,100
12	13,000	3,200	8,000	1,900	5,300	1,100

RPM=rev. / min.
FEED=mm / min.



	ae
ALUMUNUM ALLOY, ALUMINUM ALLOY CASTING	0.1D
MAGNESIUM ALLOY, COPPER ALLOY	0.05D




	ap
ALUMUNUM ALLOY, ALUMINUM ALLOY CASTING	0.15D
MAGNESIUM ALLOY, COPPER ALLOY	0.1D

WAR503 series ▶ Side Cutting

General Cutting

MATERIAL	ALUMUNUM ALLOY (A7075)		ALUMINUM ALLOY CASTING (Si13%)		MAGNESIUM ALLOY, COPPER ALLOY	
	DIAMETER(mm)	RPM	FEED	RPM	FEED	FEED
3	21,000	1,100	21,000	1,100	7,950	325
4	15,500	1,250	15,500	1,250	5,950	365
5	12,500	1,300	12,500	1,275	4,750	385
6	10,500	1,400	10,500	1,400	3,950	400
8	7,950	1,500	7,950	1,500	2,950	460
10	6,350	1,700	6,350	1,700	2,350	475
12	5,300	1,750	5,300	1,750	1,950	510
16	3,950	1,750	3,950	1,750	1,450	510
20	3,150	1,750	3,150	1,750	1,150	510

RPM=rev. / min.
FEED=mm / min.




WAR503 series ▶ Side Cutting

High Speed Cutting

MATERIAL	ALUMUNUM ALLOY (A7075)		ALUMINUM ALLOY CASTING (Si13%)		MAGNESIUM ALLOY, COPPER ALLOY	
	DIAMETER(mm)	RPM	FEED	RPM	FEED	FEED
3	40,000	2,100	24,000	1,250	17,000	625
4	32,000	2,250	19,200	1,550	14,300	800
5	32,000	3,250	19,200	1,950	12,700	925
6	26,500	3,500	15,900	2,150	10,600	960
8	20,000	3,750	12,000	2,250	8,000	1,130
10	16,000	4,300	9,600	2,580	6,350	1,150
12	13,300	4,400	8,000	2,650	5,300	1,250
16	10,000	4,400	6,000	2,650	4,000	1,250
20	8,000	4,400	4,800	2,650	3,200	1,250

RPM=rev. / min.
FEED=mm / min.




WAR503 series ▶ Slotting

General Cutting

MATERIAL	ALUMUNUM ALLOY (A7075)		ALUMINUM ALLOY CASTING (Si13%)		MAGNESIUM ALLOY, COPPER ALLOY (AZ91 · AZ80A · C1100)	
	DIAMETER(mm)	RPM	FEED	RPM	FEED	FEED
	3	21,000	770	2,100	770	325
	4	15,500	810	15,500	810	375
	5	12,500	860	12,500	860	385
	6	10,500	950	10,500	950	400
	8	8,000	1,000	8,000	1,000	460
	10	6,350	1,150	6,350	1,150	475
	12	5,300	1,200	5,300	1,200	510
	16	3,950	1,200	3,950	1,200	510
	20	3,150	1,200	3,150	1,200	510

RPM=rev. / min.
FEED=mm / min.




WAR503 series ▶ Slotting

High Speed Cutting

MATERIAL	ALUMUNUM ALLOY (A7075)		ALUMINUM ALLOY CASTING (Si13%)	
	DIAMETER(mm)	RPM	FEED	FEED
	3	40,000	1,450	880
	4	32,000	1,700	1,000
	5	32,000	2,200	1,350
	6	26,500	2,400	1,450
	8	20,000	2,500	1,500
	10	16,000	2,800	1,700
	12	13,300	2,950	1,800
	16	10,000	3,000	1,800
	20	8,000	3,000	1,800

RPM=rev. / min.
FEED=mm / min.





WAF303 series ▶ Slotting, Side Cutting


General Cutting

MATERIAL	ALUMINUM, NONFERROUS METALS			
DIAMETER(mm)	RPM	FEED	RPM	FEED
6	10,500	800	13,500	1,050
8	8,000	700	10,500	900
10	6,500	750	8,500	950
12	5,250	800	6,800	1,050
16	4,000	800	5,200	1,050
20	3,200	800	4,200	1,050

RPM=rev. / min.
FEED=mm / min.



Best Tools, Best Choice For Your Vision

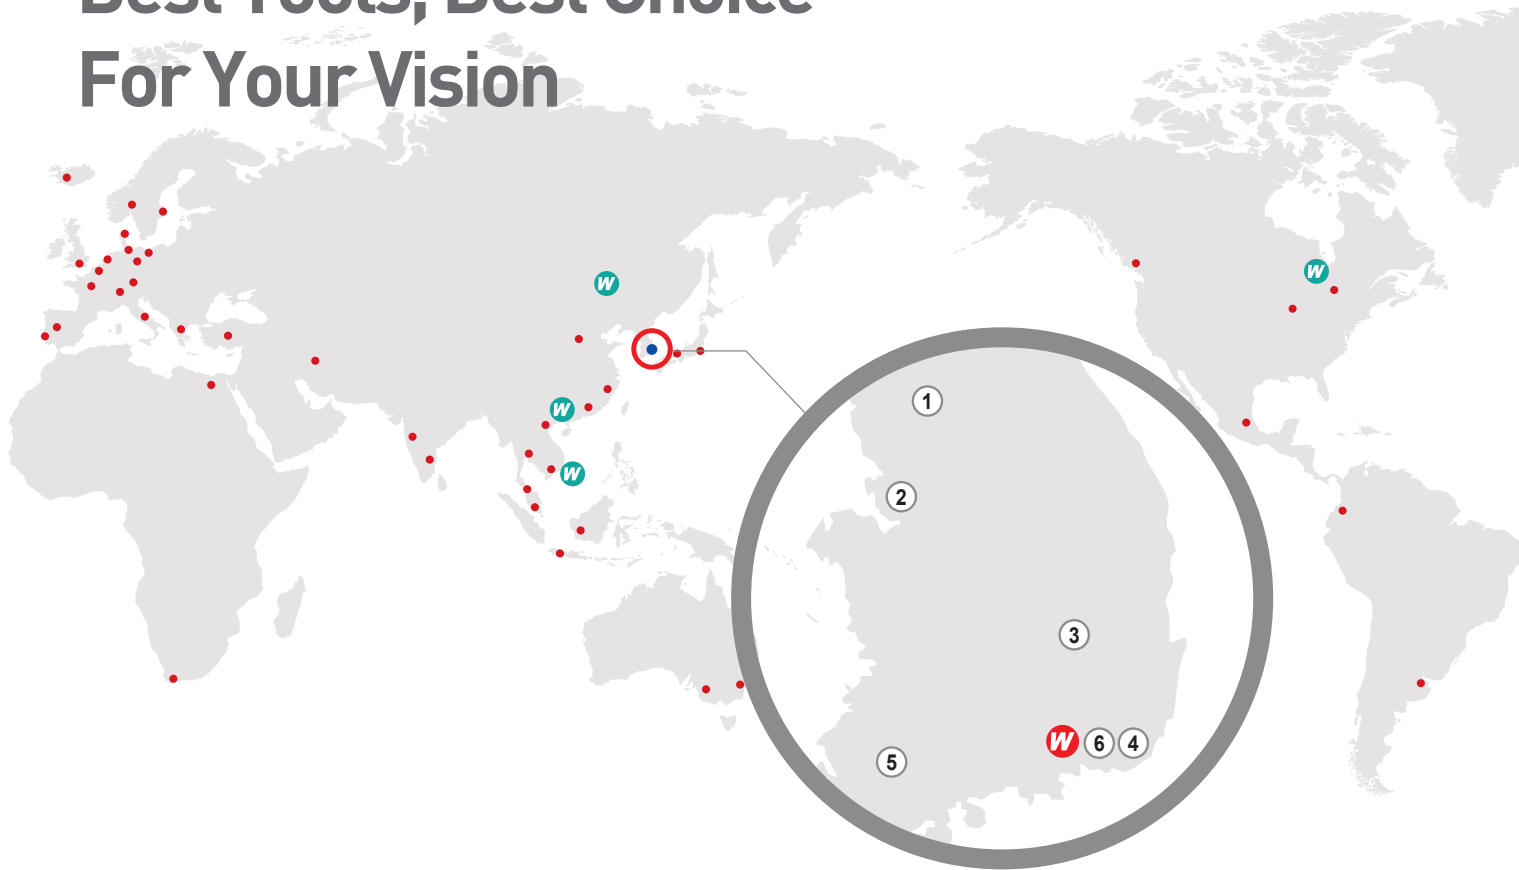

WIDIN's Local Business Sites

- Argentina
- Australia
- Austria
- Belgium
- Brazil
- Canada
- China
- Colombia
- Czech
- Denmark
- Egypt
- France
- Germany
- Greece
- Hong Kong
- Hungary
- India
- Indonesia
- Iran
- Italy
- Japan
- Malaysia
- Mexico
- Netherlands
- New Zealand
- Norway
- Philippines
- Poland
- Portugal
- Russia
- Singapore
- Slovenia
- South Africa
- Spain
- Sweden
- Switzerland
- Thailand
- Turkey
- U.S.A
- United Kingdom
- Vietnam

 Head Office(Changwon Factory)	TEL. 055-286-0905	FAX. 055-286-0978
 Chicago Office	TEL. 1-847-947-8320	FAX. 1-847-947-8322
 Shanghai Office	TEL. 86-21-5831-8103	FAX. 86-2-5831-8153
 Vietnam Hanoi Office	TEL. 84-4-6287-3839	FAX. 84-4-6287-3828
 Vietnam Ho Chi Minh Office	TEL. 84-8-2253-1117	FAX. 84-4-6287-3828
1 Seoul Office	TEL. 02-2679-0980	FAX. 02-2679-0970
2 Shihwa Office	TEL. 031-430-5446	FAX. 031-430-5579
3 Daegu Office	TEL. 053-604-0968	FAX. 053-604-0932
4 Busan Office	TEL. 051-319-0914	FAX. 051-319-0976
5 Gwangju Office	TEL. 062-961-0985	FAX. 062-961-0982
6 Changwon Office	TEL. 055-277-9911	FAX. 055-237-0904



Head office & Changwon Factory

172, Sahwa-ro, Uichang-gu, Changwon-si, Gyeongsangnam-do, Korea [51389]

Chicago Office(WIDIN, INC.)

1801 Hicks Rd, Unit B Rolling Meadow il 60008

Shanghai Office(WIDIN Shanghai Trade Co.,Ltd.)

#303, NO 6818-10, Zhong Chun RD Min Hang District, Shanghai, China 201101

Vietnam Hanoi Office(WIDIN VINA Co.,Ltd.)

Room A308, 3rd floor, The Manor Tower, Me Tri Rd, My Dinh Ward, Nam Tu Liem Dist, Hanoi City, Vietnam

Vietnam Ho Chi Minh Office(WIDIN VINA Co.,Ltd.)

Room 402, Ben Thanh Tourist Building 1, 79 Nguyen Trai St., Ben Thanh Ward, HCMC, Vietnam

www.iwidin.com



2015 Alumunum series

ÀLU—WAVE

Head office & Changwon Factory

172, Sahwa-ro, Uichang-gu, Changwon-si, Gyeongsangnam-do, Korea [51389]

Chicago Office(WIDIN, INC.)

1801 Hicks Rd, Unit B Rolling Meadow il 60008

Shanghai Office(WIDIN Shanghai Trade Co.,Ltd.)

#303, NO 6818-10, Zhong Chun RD Min Hang District, Shanghai, China 201101

Vietnam Hanoi Office(WIDIN VINA Co.,Ltd.)

Room A308, 3rd floor, The Manor Tower, Me Tri Rd, My Dinh Ward,Nam Tu Liem Dist, Hanoi City, Vietnam

Vietnam Ho Chi Minh Office(WIDIN VINA Co.,Ltd.)

Room 402, Ben Thanh Tourist Building 1, 79 Nguyen Trai St., Ben Thanh Ward, HCMC, Vietnam