

Pneumatic grinder including connection adapter for deburring, polishing and machining welding seams – long

The RUKO pneumatic grinder has a rubberised, non-slip handle, which absorbs vibration and protects the user from slipping off whilst working. The speed can be adjusted by a governor on top of the handle. It has a tool adapter made of hardened steel. The exhaust air is directed backwards through the handle by means of a 360° rotational principle.

The RUKO pneumatic grinder features an integrated air filter, which protects the motor from dirt that could get into the inside with the compressed air. The tool extension makes it possible to work in tight, difficult to reach and deep places.




2 tbg./pcs.	Pneumatic grinder (long)	116 130 L

	Speed: 25.000 U/min		Hose size: 3/8"
	Tool adapter: Ø 6.0 mm		Noise level: 77 dB(A)
	Ø - Average air consumption: 113 L/Min		Total length: 257.0 mm
	Compressed air adapter: G 1/4"		Weight: 0.90 kg
	Air pressure: 6.2 bar		



09

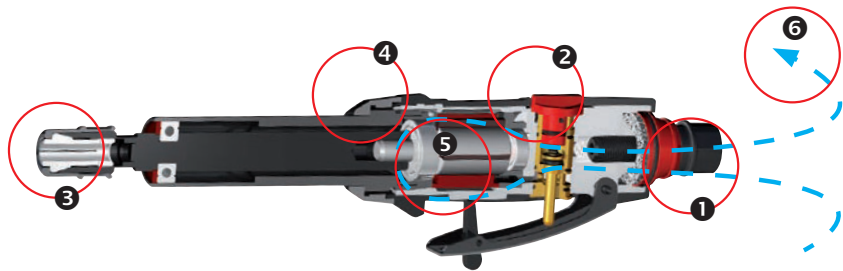

- 1 Air filter
- 2 Speed control
- 3 Adapter made of hardened steel
- 4 Rubberised, non-slip handle
- 5 Heavy-duty vane motor
- 6 Exhaust air directed through the handle by means of 360° rotational principle